




Floor gate BTM

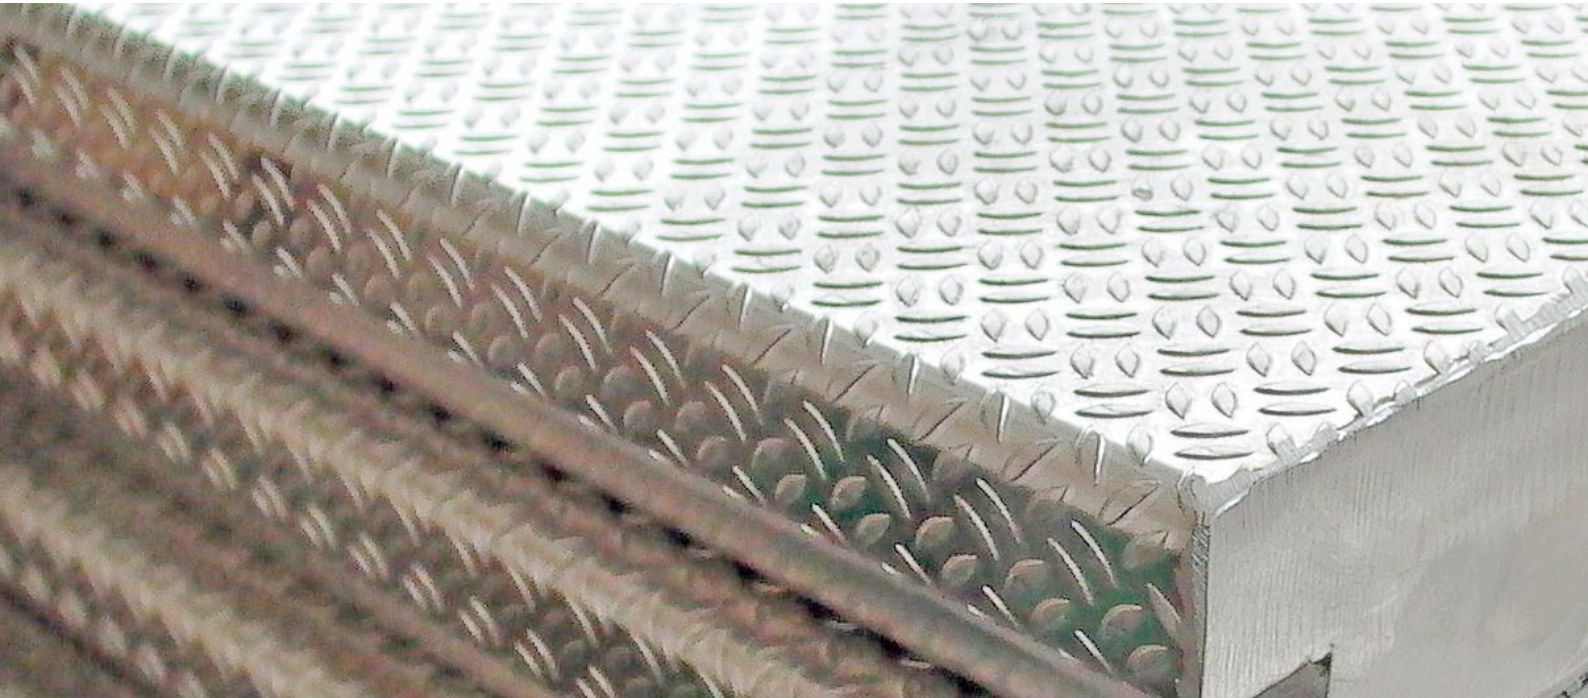

The floor gate type BTM is ideal as a cover for assembly holes in the food industry. During construction, it has been ensured that it respects high hygiene standards. Unlike a control plate, the barley grain surface of the gate is easy to clean. In addition, the structure of the granulated surface offers high resistance to slipping. The core of the door consists of a very stable Kerto®-Q laminated wood panel.

We manufacture the doors according to your specifications. All parameters are possible to achieve.



+ Features & Benefits

- Hygienic
- High strength
- High fire resistance, classification F30 – F90
- Practical anti-slip surface
- Quick to dismantle

+ Kerto®-Q

Kerto®-Q consists of individual laminate layers. They are parallel and transversal to the longitudinal direction of the panels. Kerto®-Q is very stable and resists high loads.

+ 24/7

We preferably work whenever we don't disturb you, for example on evenings or weekends.