




Televibrator XT maintains bulk material flow

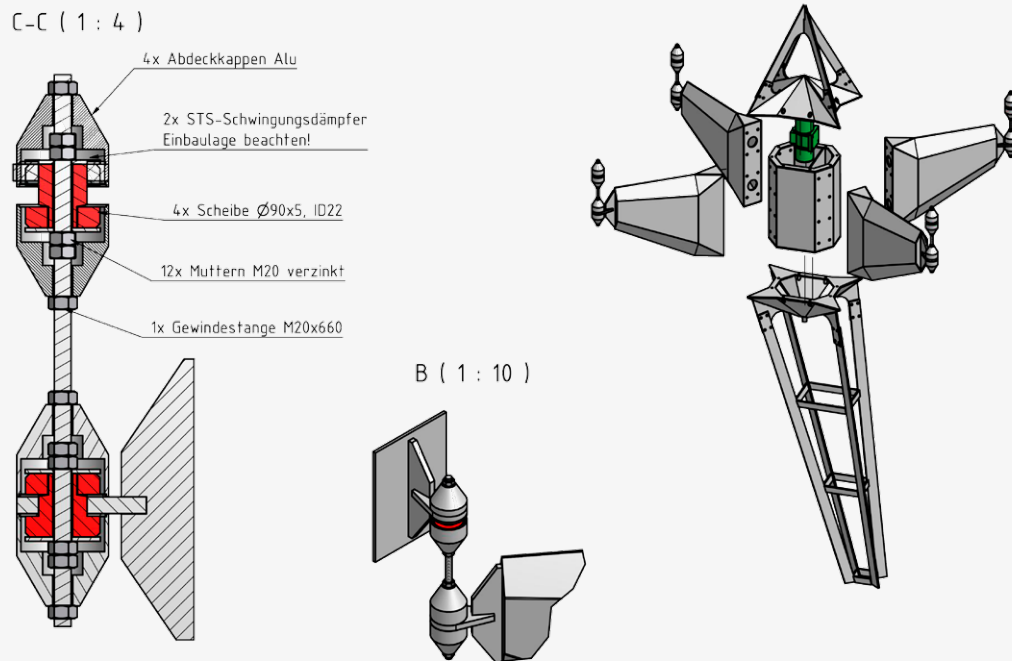

Evacuation problems can easily occur in the evacuation hopper area, which can result in costly installation inactivity or mixing errors. Silo equipment can bake on the wall or form bridges or archways. A possible core flow, also known as rat burrow formation.

The televibrator essentially consists of a controlled vibratory motor that separates and liquefies granular material. Its four mounting wings are suspended from a side support. As a result, vibrations transmitted to the silo are minimal.

The upper and lower knives of the unit prevent the formation of new bridges.

The televibrator is suitable for all kinds of loose products. Our installation team will be pleased to adapt the shape and size to the dimensions of your silo cell.





✦ ATEX requirements

The televibrator complies with the low voltage regulation 2006/95/EC and the machinery legislation 2006/42/EC.

✦ Central location

Due to our central location directly on the A1, we are in a reasonable distance from any mill. Our highly efficient team operates 24/7.

✦ A wide range of services

Morewa AG also offers chain conveyors, primary filters and elevators, trough screw conveyors and pallet dryers. From its own workshop, the company has an inspection station to corrugate and smooth the cylinders.

